

BALER

ATS 110-75




**Ideally suited to Distribution and Warehousing applications.
Cardboard, boxes, loose or pre-baled.**

This type of baler is designed for baling waste paper, smaller cardboard packaging, plastics, MSW etc.

- Feeding can be controlled by a photocells in the hopper.
- Bale length is controlled by the length control wheel or by No. of strokes.
- Bales can be tied either in 4x horizontal or 4x vertical direction.
- Press chamber is made of wear resistant sheet metal.
- This is shearing baler can be equipped with two side flaps help baling paper, PET, etc.
- There is a choice of single material control system or multi-material (up to 20) including proportional pressure control. Operator just needs to choose the adequate pre-set programme.

Advantages:- High speed and small space required, Baler with high shearing capacity.

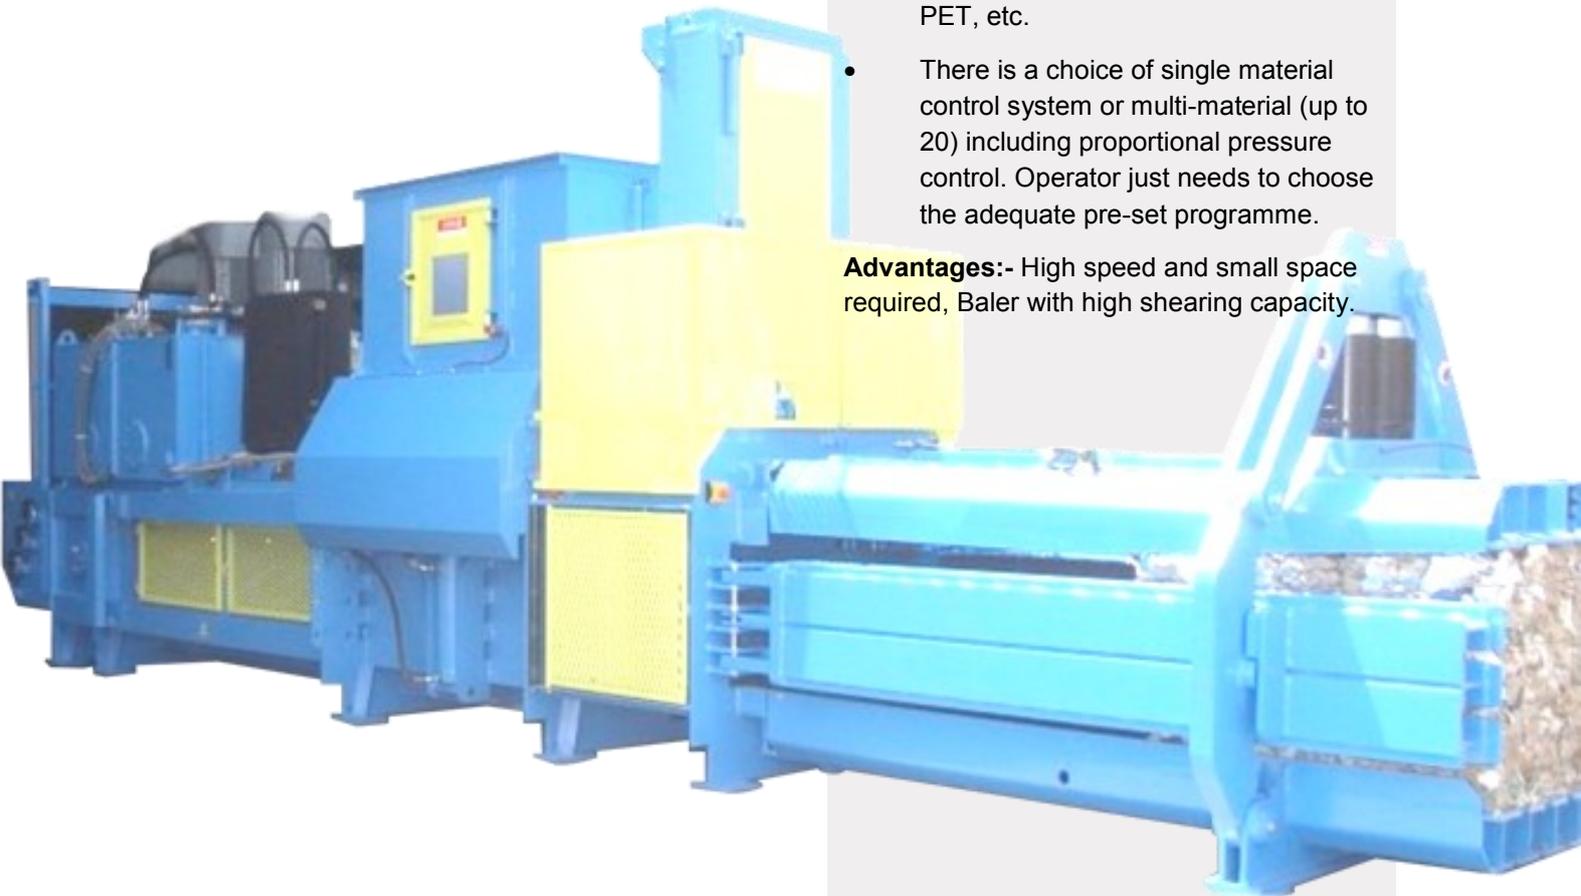

Technical Specifications

Press force	t	Max. 142	Max. 115	Max. 91	Max. 74	Max. 58	Max. 45
Specific pressure	kg/cm ²	16.2	11.8	9.5	7.5	7.1	5.4
Power	kW	180 / 135	135 / 90	90 / 60	60 / 45	45 / 22	30 / 22
Bale size (W X H X L)	cm	110x110x50-220	110x110x50-220	110x110x50-220	110x110x50-220	110x110x50-220	110x110x50-220
Feed opening	cm	160 x 104					
Cycle time	s	13 / 21	11 / 21	13 / 17	11 / 22	11 / 26	13 / 21
Capacity (50 kg/m ³)	t/h	10 / 6.5	9.5 / 6	9.5 / 6	11 / 5.5	10.5 / 5.5	9 / 5.5
Auto-tier		4x horizont. (4x vertical)					

Technical Sketch

