


BALER



P 600

Baler P-600 is automatically operated. Cycle is started by means of photo switch in the feeding hopper. If there is no material for baling, motor stops waiting for feed. Highest load material in hopper is sheared by blade. The baler is equipped with front door, opened when pushing the bale out of press chamber. The front door moves up, pushed by two hydraulic cylinders. Bale length is adjustable. The baler can be operated manually, too.

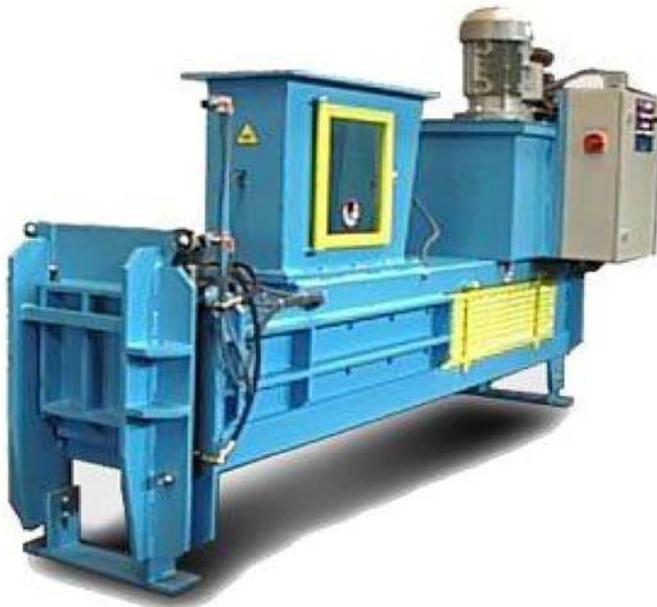

TECHNICAL SPECIFICATIONS		
Press force	t	max 65
Power	kW	15
Bale size (W X H X L)	cm	40 X 40 X 50
Feeding opening	cm	150 X 40
Prepressing		ne
Binding		ne

TECHNICAL SKETCH

